

The king of leaves

Our LEAF-GUARD will keep your gutters clean as a hound's tooth.




Every year same story.




Our LEAF-GUARD will keep your gutters clean as a hound's tooth.

The lightweight and easy-to-install plastic mesh tube POLY-NET® LEAF-GUARD fits perfectly in the gutters to keep the autumn leaves out. Being UV-resistant and weather-proof, this faithful servant will stay on guard for years to come. And, as it is recyclable, the ecological footprint is lighter, too. Effective & efficient high-end German engineering – pure and simple.


EASY TO INSTALL




Press the plastic mesh tube gently together and place it inside the gutter with the slit downward. If the roof doesn't have an overhang that keeps the tube in place, fix it to the gutter



Cut out openings for downpipes and remove the downpipe sieves.




Make a mitre cut in the corners.



To prevent birds from nesting inside the tube, close off the ends by folding them tightly to the end wall of the gutter.

GET THE PERFECT FIT

Technical data	
Gutter width	Tube type
80 mm	R 174/0
100 and 125 mm	R 172/0
150 and 180 mm	R 178/0

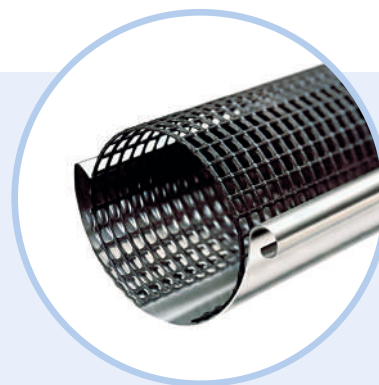

SIMPLE YET GENIOUS


Leaves that fall remain on the net surface, dry out and are blown away by the wind, keeping the gutter clean as a whistle.



All data reflect the current state of NSW's technology and are intended solely to provide information on NSW products and their potential applications. They are not intended to guarantee product properties or the suitability of products for specific applications.

PRYSMIAN

Norddeutsche Seekabelwerke GmbH
Kabelstr. 9-11, 26954 Nordenham, Germany
Phone: +49 4731 82 13 56
nsw.polynet@prysmian.com



nsw.com

© All rights reserved by Prysmian 2024-02 | Version 2.

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian: any modification or alteration afterwards of product may give different result. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed to be correct at the time of issue. Prysmian reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian.

POLY-NET® is a registered trademark of Norddeutsche Seekabelwerke GmbH.

Follow us

